


Actuator and sensor cable, PUR-Connection cable, M12, A-coding, 5-pin, Shielding



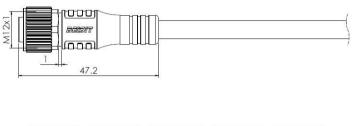

Typecode	M12A05CZF2ZU050S00
ID	1006050000114

Technical Data*

Connector A

Connector	Female, M12 x 1, straight, A-coding
Number of pins	5-pin
Contacts	Brass, Gold-plated
Coupling nut/screw	Zinc, Nickel-plated
Contact carriers	PA
Seal	FKM
Connector body	PUR, black
LED	No
Mechanical lifespan	≥100 Mating cycles
Pollution degree	3
Protection class	IP67, Only in screwed condition
Locking mode	Screw, M12 x 1
Standard	IEC 61076-2

Cable


Cable length	5.0 m
Cable diameter	Ø 6.00 mm ±0.20 mm
Cable jacket	PUR, black
Sheath stripping length	50 mm
Shielding	Yes
Core insulation	PP
Label for cables	L=20 mm, PVC
Core colors	1-BN, 2-WH, 3-BU, 4-BK, 5-GY
Conductor structure	43/0.10 mm, Bare copper, stranded
Core cross-section	5 x 0.34 mm²



Features

M12, Female, straight, 5-pin
Stripping of cable tail jacket
Cable jacket material: PUR
Jacket color: black
Resistant to chemicals and oils
Resistant to salt spray
Resistance to welding sparks
Resistant to abrasion
Suitable for mobile cabling applications
Anti vibration
Protection class: IP67
RoHS-compliant
Approval: cULus, CE

Cable structure





Technical Data

Floctrical	nronerties

Lieutical properties	
Connector rated voltage	60 V
Connector rated current	4 A
Connector insulation resistance	≥100 MΩ
Cable rated voltage	300 V
Cable test voltage	2000 V
Cable conductor resistance	≤55.4 Ω/km

Mechanical and chemical properties

Bending radius (stationary installation)	≥5xØ
Bending radius (fiexible use)	\geq 10 x Ø
Bending cycles	≥1 Mio.

Operation temperature

Ambient temperature range (stationary)	-40 °C 80 °C
Ambient temperature range (in motion)	-25 ℃ … 80 ℃


Commercial data

Country of origin	CN
Packaging unit	1 pc

Contact assignment



Connection diagram



* Please note that the data specified here were design data, and the parameters of product are subject to changes without prior notice. Matters not mentioned herein. Please contact customer service. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.