
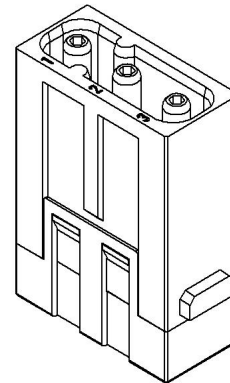



HM Series, Axial screw terminal,3 pin, Male module

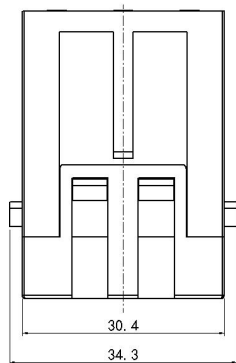

Typecode HM040-003-M-2

ID 1007040000043

Technical Data

Product Properties

| | |
|-------------------------------------|---|
| Series | HM |
| Size of the module | module frames |
| Connection mode | Axial screw terminal |
| Gender | Male |
| Rated voltage | 690V |
| Rated current | 40A |
| Rated impulse voltage | 8KV |
| Number of pins | 3 |
| Core cross-section/Clamping ability | 6 ~ 10mm ² /AWG10 ~ AWG8 |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Temperature range | -40°C ~ +125°C |
| Tightening torque | 6mm ² -8mm ² @2Nm |
| Standard | EN 60664-1 IEC 61984 |

Features

- High quality engineering plastics
- Axial screw terminal
- ≥ 500 Mating cycles
- Approval: UL, CE
- RoHS-compliant

Insert

| | |
|------------------|-----------------------------|
| Material | PC |
| Colour | Gray (RAL 7032) |
| Contact material | Copper alloy silver plating |

Commercial data

| | |
|-------------------|---------|
| Weight | 0.025kg |
| Packaging unit | 1 pc |
| Country of origin | CN |

*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。