

BEISIT®

倍仕得电气科技(杭州)股份有限公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD.



BTG TYPE Fluid Connector
BTG流体快速连接器

倍仕得园区鸟瞰图
Beisit factory Aeroview



做人, 把人品做好,
做企业, 把产品做好。

董事长: 李永乐

产品合集
Product Collection



品牌解析

Brand Definition

The logo for BEISIT, featuring the word "BEISIT" in a bold, italicized, sans-serif font. The letters "B", "E", "I", and "S" are red, while "I" and "T" are blue. A registered trademark symbol (®) is located at the end of the word.

"I" stands for "Integrity 诚信"

"I" stands for "International 国际"

"BEST": Best 最好

做诚信的国际企业，以更好的品质服务客户

Functions as an international company of high integrity whose mission is to provide customer with finest products and services

倍仕得

倍：即多，广聚英才；加倍，业精于勤；倍增，高效发展

pronounced as "bei", means "more", gathering more talents; mastery of work comes from more diligence; developing with high efficiency.

仕：人才，德才兼备；仕途，个人和企业前景光明

pronounced as "shi", means "talents", a person with ability and integrity; Both enterprise and individual should have a bright future, indicating the idea of people-oriented.

得：拥有，拥有更高价值

pronounced as "de", means "possess", to create and possess higher value.

广聚英才，共创美好未来

Gather a large number of talents, and create a glorious future


流体连接器净化车间

Quick Fluid Connector Purification Workshop

BEISIT[®]

精密刀具设计制造能力

Design and Manufacture of Precision Cutting Tools.



精密刀具设计制造

Design and Manufacture of Precise Cutting Tools



精密刀具设计制造能力

Design and Manufacture of Precision Cutting Tools

加工精度最高能精确到0.01mm

The machining accuracy can be accurate to 0.01mm

3天提供金属样件

3days to provide metal samples

7天样件交付

7days to deliver samples



企业认证 Company Certifications



信息化系统

Informatization System



高效快捷的信息化系统
Efficient and fast Informatization system.



检测中心 Testing Center



原材料：金属材质检测

The raw materials:metal material testing

密封件：抗老化测试、硬度检测

The sealing:anti-aging test,hardness testing

弹簧：疲劳测试，弹力值检测

The spring:fatigue test,spring force detection



高低温交变湿热试验箱
High and Low Temperature Alternating Humid Heat Test Chamber



流量流阻测试仪
Flow resistance tester



全自动数显弹簧疲劳试验机
Automatic digital display spring fatigue testing machine



机加工零件：粗糙度检测、尺寸测量


Machined parts:roughness detection,dimensional measurement

表面处理：膜厚检测、盐雾测试

Surface treatment:film thickness detection,salt spray test

产品：耐压测试、密封性测试、流量系数测试、连接力和分开力测试、耐久性测试、
最小爆破压力测试、高温测试、低温测试、互换性测试


Product:withstand voltage test,sealing test,flow coefficient test,connection and separation
force test,durability test,sinimum burst pressure test,high temperature test,low temperature
test,interchangeability test



全自动数显弹簧拉压力试验机
Automatic digital display spring tension pressure testing machine




中性盐雾试验箱
Neutral Salt Spray Tester

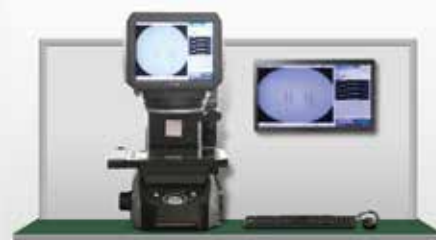

图像尺寸测量仪
Image dimension measuring instrument



气密性检测仪
Air tightness tester

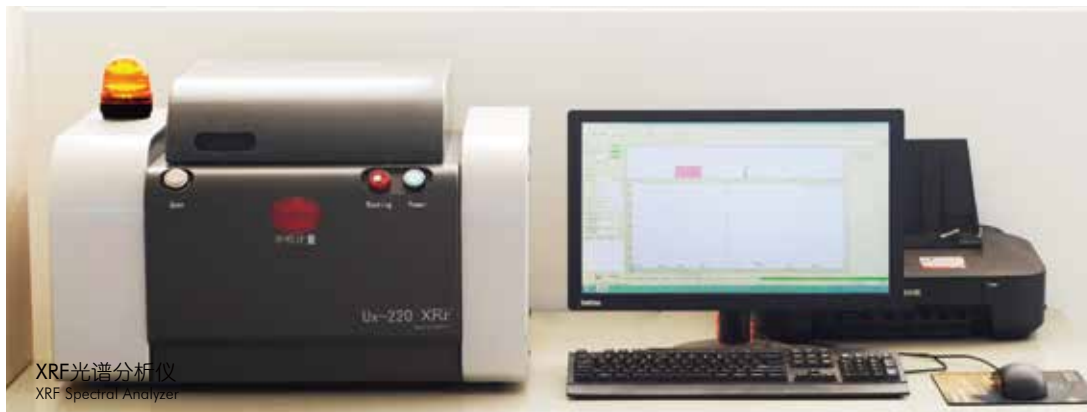

XRF光谱分析仪
XRF Spectral Analyzer

企业文化

Corporate Culture



倍仕得使命：为全球工业提供最可靠的连接器产品
Mission: To supply most reliable connectors for global industry.

客户价值观：敬畏客户；为客户创造独特价值的决心不动摇
Customer Value: Revere clients; Never waver in determination to create unique value for our clients.

品质价值观：品质如命，只有一次；做出100%合格产品的决心不动摇
Quality Value: Quality as life, only once. Never waver in determination to produce 100% qualified products.

A large, stylized image of the Earth from space, showing the Americas. Overlaid on the globe is a network of glowing blue and white lines and nodes, representing global connectivity and technology.

连接世界 · 连接未来

BTG

流体快速连接器

BTG Fluid Connector



安全环保 Safe & Environmental

- 干式接头，双向平面密封，连接/断开无泄漏。
- 平面密封设计，既方便清洁，又避免介质受污染。
- 插头、插座均配有保护套，防止在运输中密封面受污染。
- Dry Disconnect Couplings, Bi-directional flat sealed design that ensures no leakage during connection and disconnection.
- Flat seal design, which is easy to clean and avoids contamination of the medium.
- Plug and Socket are equipped with protective caps to prevent the sealing surface from being polluted during transportation.

稳定可靠 Stable & Reliable

- 精选的材质配合独特的表面处理使产品坚固可靠的同时，实现高耐腐蚀性、高耐磨性。
- 有多种密封材质O型圈可选，适应不同介质温度需求，保证密封效果长期稳定可靠。
- 插头插座连接处O型圈的径向设计，保证在连接时，阀门打开前已完成密封。
- The selected material combined with unique surface treatment not only makes the product sturdy and reliable, but also achieving high corrosion resistance and wear resistance.
- Various sealing material O-rings are available to meet the temperature requirements of different media and guarantee long-term stable & and reliable sealing performance.
- The radial design of the O-ring at the connection of the Plug and Socket ensures that the sealing function has been completed before the valve is opened during connection.

方便快捷 Convenient

- 旋入即可锁紧连接密封，操作轻松方便。
- 多种颜色选择，快速辨别不同回路。
- 大口径可选手轮，更容易连接和断开。
- Screw-in to lock the connection seal, easy and convenient to operate.
- Multiple color options for quick identification of different circuits.
- Hand wheel is available for large diameter, which is easier to connect and disconnect.

个性化定制 Customized

- 可定制接头尾端匹配接口，方便安装。
- 定制软管集成，美观，降低泄漏风险。
- 其他定制要求请咨询我司。
- Providing customized end-fitting for easy installation.
- Providing customized hose integration with aesthetic appearance and reducing risk of leakage.
- For other customization requirements, please contact us freely.

BTG

流体快速连接器

BTG Fluid Connector



应用领域 Application Fields

- 军工防务 Military defense
- 石化 Bulk chemical and petrochemical
- 生物技术 Biotechnology
- 流体分配和传输系统 Biotechnology Fluid distribution and transfer system
- 铁路槽罐车、槽罐车、船舶、集装箱、储罐和吨桶的装载和卸载
loading and unloading of railway tank cars,tank cars,ship ,containers and tons of drums
- 测试平台连接 The link for the test stand

流体 Fluids

- 石油 Petroleum
- 天然气 Natural gas
- 特殊化学物质 Special chemical
- 可对客户特殊流体针对性开发 It can be developed for customers' special fluids

.....

基础型号 补充选项, 后缀信息
BTG 25S G01F - SS - NB

密封圈 Sealing

EP 乙烯橡胶EPDM (默认)	FF 高氟橡胶FFKM
NB 丁腈橡胶NBR	CR 氯丁橡胶CR
FM 氟碳橡胶FPM/FKM/Viton	
FV 氟硅橡胶FVMQ	

材料 Material

SS 不锈钢316L (默认, 型号不体现)
AL 铝合金
SA 不锈钢304

内外螺纹 Internal and external threads

F 内螺纹
M 外螺纹

G/R/N/J螺纹尺寸 Size

01 1吋	03 3吋
32 1-1/2吋	04 4吋
02 2吋	
52 2-1/2吋	

M螺纹尺寸 Size

08 M8螺纹
12 M12螺纹
21 M21螺纹
F3636 法兰孔36x36

连接方式 Connection method

G G螺纹	J UNF螺纹JIC37°锥 ISO8434
R R螺纹	M M螺纹
N NPT螺纹	F 法兰Flange

插头插座 Plug socket

S 插座
P 插头

标称口径 Nominal aperture

25 等效直径20mm	65 等效直径50mm
32 等效直径25mm	80 等效直径60mm
40 等效直径30mm	00 等效直径80mm
50 等效直径40mm	

类目名称 Category name

B 自动连接平面密封	BBT 卡口
S 不含锁紧系统	BTG 三曲槽
T 其他	BSL 钢珠自锁
	SCB 盲插
	SDB 位移盲插
	TPP 推拉平面密封
	TSF 螺纹锁紧连接
	TPB 按钮金属接头

材质 Material	编码 Code	工作温度 Working temperature	应用 Application
丁腈橡胶 NBR	NB	-15 ~ + 100°C	1、一般应用 2、良好的机械强度 1. General applications. 2. High mechanical strength.
氟碳橡胶 FPM、FKM、Viton	FM	-10 ~ + 200°C	1、良好的耐化学性 2、优异的耐高温性能，可用于最高200°C的应用 3、适用于矿物油、合成液压油、燃料、化工产品、碳氢化合物和导热流体回路 1. Good chemical resistance. 2. Outstanding resistance to hightemperatures up to 200°C. 3. Resistance to mineral oils, synthetichydraulic oils, fuels, chemicals.hydrocarbons and coolants.
乙丙橡胶 EPDM	EP	-20 ~ + 150°C	1、优异的耐高温性 2、适用于磷酸盐酯型制动液，冷、热水，蒸汽 3、注意介质回路各部件不能使用含矿物油的情况 1. Excellent resistance to high temperatures. 2. Compatible with phosphate-based brakefluids - esters, hot and cold water, steam. 3. Pay attention to the use of mineral oil in the components of the medium circuit
高氟橡胶 FFKM	FF	0 ~ + 250°C	1、兼具弹性体和聚四氟乙烯耐化学腐蚀性的特点 2、具有很好的耐热性和耐多数化学剂 3、适用于导热流体 1. Combines the qualities of an elastomerwith the chemical resistance of PTFE. 2. Remarkable resistance to heat and mostchemical agents including inorganic andorganic acids. 3. Coolants.
氟硅橡胶 FVMQ	FV	-45 ~ + 175°C	1、最大工作压力：50 bar 2、良好的耐低温和耐高温性能 3、适用于矿物油、燃料 1. Max. working pressure: 50 bar. 2. Good resistance to low and hightemperatures. 3. Resistance to mineral oils, fuels.
聚四氟乙烯 PTFE	PT	-50 ~ + 200°C	1、最大工作压力：80 bar 2、良好的耐化学性 3、优异的耐低温和耐高温性能 4、比弹性体的性能更优异 1. Max. working pressure: 80 bar. 2. Excellent chemical resistance. 3. Very good resistance to low and hightemperatures. 4. Superior performance to elastomers.
氯丁橡胶 CR	CR	-40 ~ + 100°C	耐老化，特别适用于制冷液 Good resistance to ageing andrefrigerants.

为了选择最能满足您应用需求的解决方案，建议向我们提供如下准确信息：

In order to choose the solution that best meets your application needs, it is recommended to provide us with the following accurate information:

- 1、流体类型 2、工作压力 3、工作温度 4、水溶液的盐和酸浓度 5、特别的使用条件
1. Fluid type 2. Work pressure 3. Working temperature 4. Salt and acid concentration of aqueous solution 5. Special usage conditions

若需咨询，请随时联系我们的技术专家。

我们经验丰富的快速连接器专家，为您提供最贴心的服务。

If you need any inquiries, please feel free to contact our technical experts.


Our experienced quick connector experts provide you with the most thoughtful service.



普通型 Regular Type

产品型号 Product Model	BTG25	BTG32	BTG40	BTG50	BTG65	BTG80	BTG100
额定工作压力 (bar) Working Pressure (bar)	25	25	25	25	25	25	25
Cv值 (Gal/min) Cv (Gal/min)	14	26.8	37.3	67.7	91	158.7	234.6
额定工作流量 (L/Min) Working Flow (L/Min)	94	147	211	376	588	847	1507
单次插拔泄露量 (ml) Leakage Per Disconnection (ml)	0.15	0.22	1.3	2	2.8	3	3.5


BTG流量曲线
BTG Flow Chart

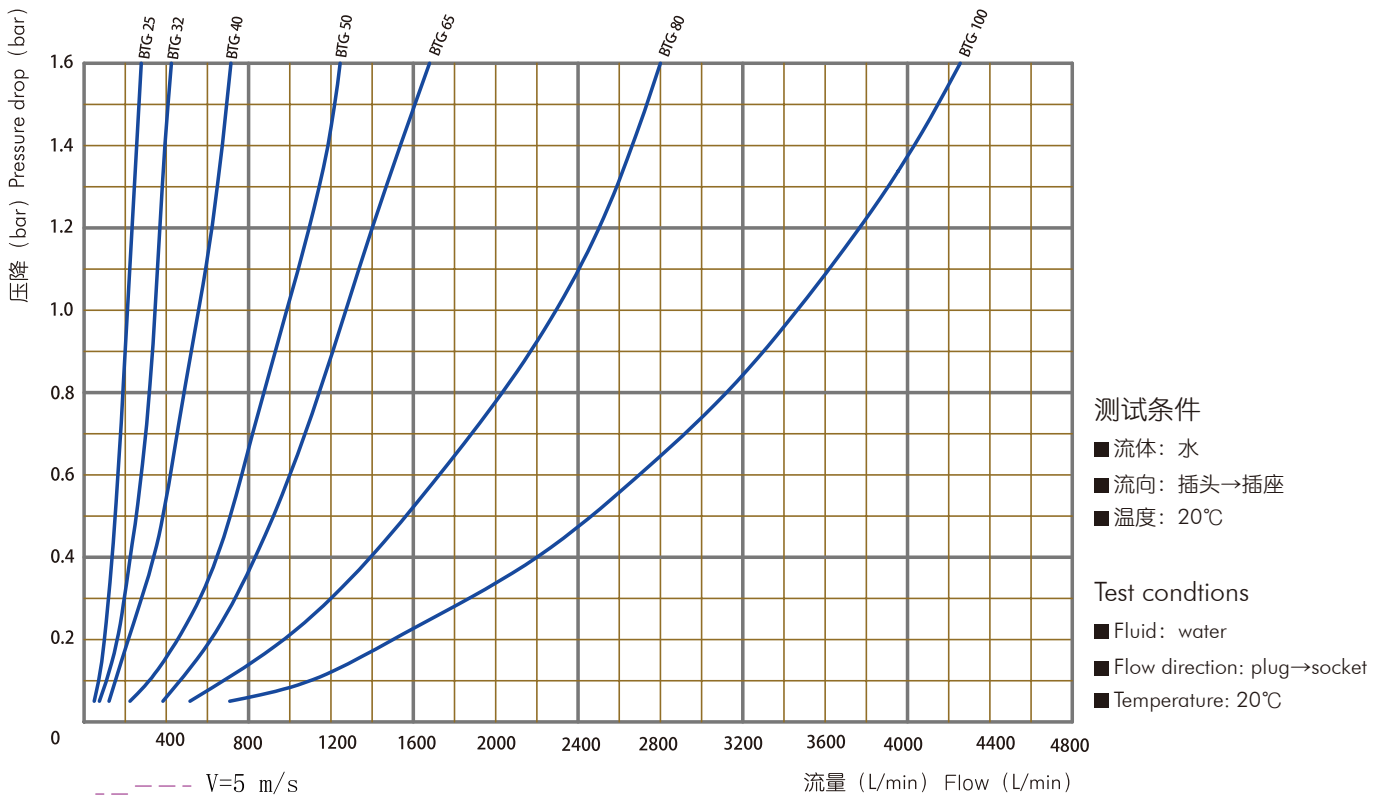

→ BTG25

插头插座连接图
Plug and socket connection diagram

$L=L1+L2-X$
 $X=39\text{mm}$

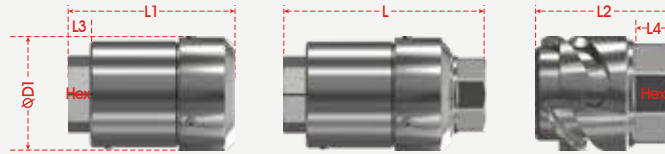


	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头		G1"	89	/	11.4	/	59.5	/	38	BTG 25P G01F
		HG/T 20592 DN25 PN25	89	/	18	/	59.5	/	38	BTG 25P F8585
插座		G1"	/	53	/	11.4	/	44	38	BTG 25S G01F
		HG/T 20592 DN25 PN25	/	107	/	18	/	44	38	BTG 25S F8585

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BTG32

插头插座连接图
Plug and socket connection diagram

$L=L1+L2-X$
 $X=44\text{mm}$

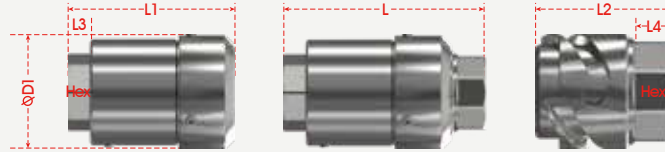


	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头		G1-1/4"	98.5	/	12	/	76	/	50	BTG 32P G54F
		HG/T 20592 DN32 PN25	116.5	/	18	/	76	/	50	BTG 32P F100100
插座		G1-1/4"	/	65	/	12	/	54	50	BTG 32S G54F
		HG/T 20592 DN32 PN25	/	77	/	12	/	54	50	BTG 32S F100100

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BTG40

插头插座连接图
Plug and socket connection diagram

$L = L1 + L2 - X$
 $X = 49\text{mm}$

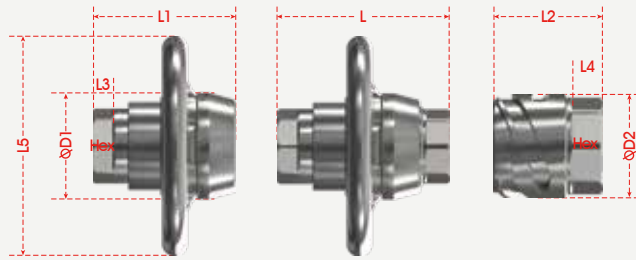


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	Hex	Product model
插头		G1-1/2"	115	/	16	/	200	89	/	55	BTG 40P G32F
		HG/T 20592 DN40 PN25	133	/	18	/	200	89	/	55	BTG 40P F110110
插座		G1-1/2"	/	76	/	16	/	/	62.5	55	BTG 40S G32F
		HG/T 20592 DN40 PN25	/	94	/	18	/	/	62.5	55	BTG 40S F110110

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BTG50

插头插座连接图
Plug and socket connection diagram

$L = L1 + L2 - X$
 $X = 56.5\text{mm}$

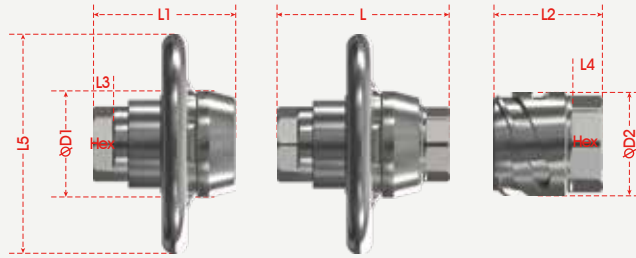


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	Hex	Product model
插头		G2"	143	/	19	/	220	106	/	70	BTG 50P G02F
		HG/T 20592 DN50 PN25	166	/	21	/	220	106	/	70	BTG 50P F125125
插座		G2"	/	85.5	/	19	/	/	79.6	70	BTG 50S G02F
		HG/T 20592 DN50 PN25	/	107	/	21	/	/	79.6	70	BTG 50S F125125

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BTG65

插头插座连接图
Plug and socket connection diagram

$L=L1+L2-X$
 $X=65\text{mm}$

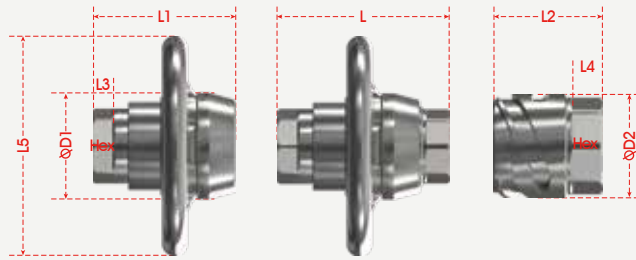


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	Hex	Product model
插头		G2-1/2"	161	/	23	/	240	121	/	85	BTG 65P G52F
		HG/T 20592 DN65 PN25	179	/	18	/	240	121	/	85	BTG 65P F145145
插座		G2-1/2"	/	95	/	23	/	/	94.2	85	BTG 65S G52F
		HG/T 20592 DN65 PN25	/	113	/	18	/	/	94	85	BTG 65S F145145

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BTG80

插头插座连接图
Plug and socket connection diagram

$L=L1+L2-X$
 $X=74\text{mm}$

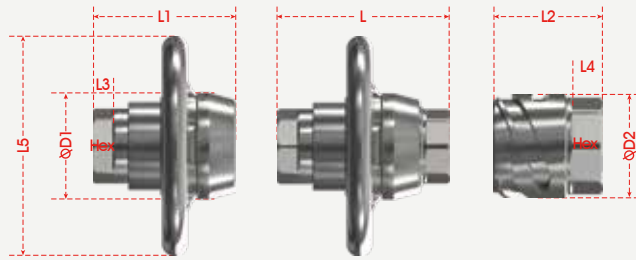


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	Hex	Product model
插头		G3"	183	/	22	/	270	148	/	95	BTG 80P G03F
		HG/T 20592 DN80 PN25	203	/	20	/	270	148	/	95	BTG 80P F160160
插座		G3"	/	105	/	22	/	/	118	95	BTG 80S G03F
		HG/T 20592 DN80 PN25	/	125	/	20	/	/	118	95	BTG 80S F160160

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BTG100

插头插座连接图
Plug and socket connection diagram

$L = L1 + L2 - X$
 $X = 83.5\text{mm}$

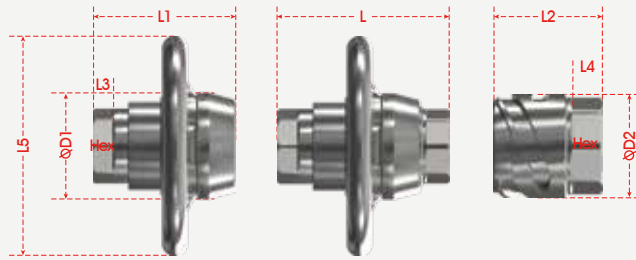

	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	Hex	Product model
插头		G4"	199	/	22	/	330	180	/	125	BTG 80P G04F
		HG/T 20592 DN100 PN25	219	/	20	/	330	180	/	125	BTG 80P F190190
插座		G4"	/	113	/	22	/	/	146	125	BTG 80S G04F
		HG/T 20592 DN100 PN25	/	133	/	20	/	/	220	125	BTG 80S F190190

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

倍仕得电气科技(杭州)股份有限公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD.

浙江省杭州市临平经济开发区唐梅路1号 邮编: 311100

Add.: 1, Tangmei Rd., Linping Economic Development Area, Hangzhou, Zhejiang 311100, China

Tel: 0086-571-8936 2888 E-mail: info@beisit.com

Http: // www.beisit.com

倍仕得电气科技(深圳)有限公司
BEISIT ELECTRIC TECH (SHENZHEN) CO.,LTD.

深圳龙华区壹成环智中心B座1203-1204单元 邮编: 518109

Add.: Unit 1203-1204, Building B, Yicheng Huanzhi Center, Longhua District, Shenzhen 518109 China

Tel: 0086-755-23730413 E-mail: info@beisit.com

Http: // www.beisit.com

倍仕得电气科技(杭州)股份有限公司天津分公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD. - TIANJIN BRANCH

天津河东津滨大道万达广场写字楼A座1416 邮编: 300171

Add.: #1416 Building A, Wanda Plaza Office Building, Jinbin Avenue, Hedong District, Tianjin 300171 China

Tel: 0086-22-85453260 E-mail: info@beisit.com

Http: // www.beisit.com



微信公众号



官网



抖音

⚠ We reserve the right to make technical changes or modify the contents of this document without prior notice. All the agreed particulars shall prevail. All rights reserved.