


## Size 3A Surface mounted hous, Lateral opening hole

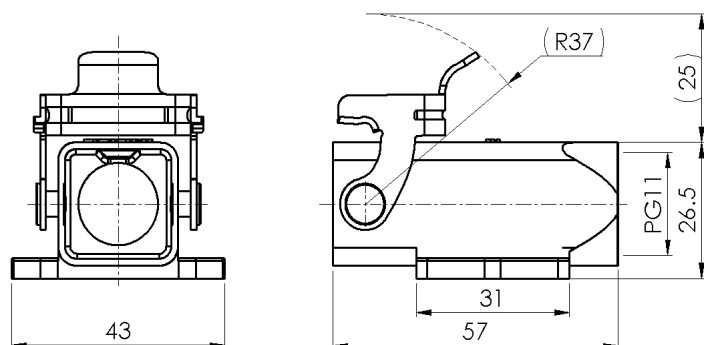

Typecode H3A-SMS-1LS-PG11

ID 1 007 01 0000019

### Technical Data

#### Product Properties

Series	Size 3A
Mating with	HA-003,HA-004,HD-007,HD-008,HQ-005
	HQ-007, HQ-012
Housing type	Surface mounted hous, lateral opening hole
Cable outlets direction	Lateral opening hole
Cable outlets	PG11
Locking type	Single locking lever
Installation mode	Panel mount
Protection Class	IP65
Impact strength	IK08
Temperature range	-40 °C ... 125 °C
Standard	DIN EN 175301-801

#### Insert

Housing material	Die-cast aluminum
Color	Gray (RAL 7037)
Latch	Stainless steel


#### Commercial data

Weight	0.080 kg
Packaging unit	1 pc
Country of origin	CN

### Features

- Die casting of zinc
- Surface fixed installation
- Lateral opening hole
- Stainless steel latch
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

### Mounting-hole Size

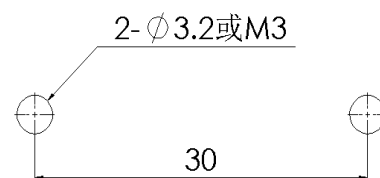

\*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。